

Sundance® Spas 680 Ramona™

Specifications

Dimensions:	89" x 89" x 36" (226 cm x 226 cm x 91.44 cm)
Perimeter	356" (904.2 cm)
Seating Capacity:	5-6 Adults
Dry Weight:	791 lbs (359 kg)
Filled Weight (Spa Volume):	5,044 lbs (2,288 kg)
Filled Weight (Average Fill):	3,960 lbs (1,796 kg)
Water Capacity (Spa Volume):	510 US Gal (1,931 Liters)
Water Capacity (Average Fill):	380 US Gal (1,438 Liters)
Controls:	Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High Flow Pumps
Pump 1:	North America (60 Hz): 2-Speed/2.5 HP Continuous, 11.0A Max., 56 Frame Export (50 Hz): 2-Speed/2.0 HP continuous, 8.0A max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 10.0A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP continuous, 8.0A max.
Optional Pump 3:	N/A
Total Hydrojets:	38
Seat A Jets:	4 - SL3R, 2 - SL5R
Seat B Jets:	2 - SL3R
Seat C Jets:	8 - SL, 8 - SL3
Seat D Jets:	1 - SL5
Seat E Jets:	2 - SL, 8 - SLR, 1 - SL3
Foot Well Jets (F):	2 - SL3
Air Controls/Massage Selectors:	2/None
Filter:	75 ft² MicroClean® Mini™ Filter Cartridge System
Water Treatment:	Factory installed CLEARRAY® unit
Lighting:	LED Lighting System (Interior Surround); 2 Standard Exterior Lights
Cabinet:	Available in Slate, Graphite
Shell Colors:	North America: Platinum, Celestite, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Headrest:	Three, 1-Piece Gray
Heater:	North America (60 Hz): 5.5 kW, High Flow Standard Export (50 Hz): 2.7 kW, High Flow Standard
Electrical Requirements:	North America (60 Hz): 240 VAC, 60 Hz@40A, 50A or 60A; Export (50 Hz): 230-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/ RCD Breakers are Required for This Configuration.
Limited Warranty*:	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Equipment and Controls, 3 Years Plumbing Component Leaks, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets
Alternative Insulation (Standard):	Yes (Insulation Panels)
Waterfall Feature:	None
Audio System (Optional):	N/A
Special Features (Optional):	Factory Installed SmartTub® module



Sundance Spas 680 Ramona

Operation/Seat Depths



(A) Air Control - Activates Seat A Jets (4 - SL3R, 2 - SL5R) + Seat B Jets (2 - SL3R) + Seat E Jets (2 - SL, 8 - SLR, 1 - SL3) + Footwell Jets (2 - SL3)

(B) Air Control - Activates Seat C Jets (8 - SL, 8 - SL3) + Seat D Jets (1 - SL5)

- Jets Pump 1: Powers Seat A Jets + Seat B Jets + Seat E Jets + Footwell Jets when running

- Jets Pump 2: Powers Seat C Jets + Seat D Jets when running

38 Total Jets



SL Jets (10)



SLR Jets (8)



SL3 Jets (11)



SL3R Jets (6)



SL5 Jet (1)



SL5R Jets (2)

Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 27.00" (66.58 cm)

B = 23.00" (58.42 cm)

C = 25.25" (64.14 cm)

D = 22.50" (57.15 cm)


E = 23.00" (58.42 cm)

F = 27.00" (68.58 cm)

G = 20.00" (50.80 cm)

H = 30.00" (76.20 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**

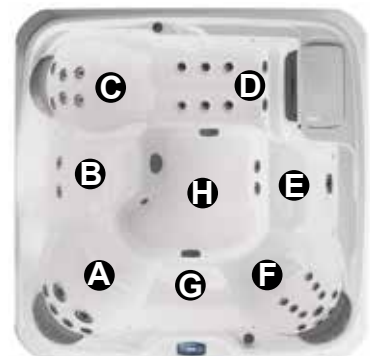


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 Ramona

Portable Dimensions

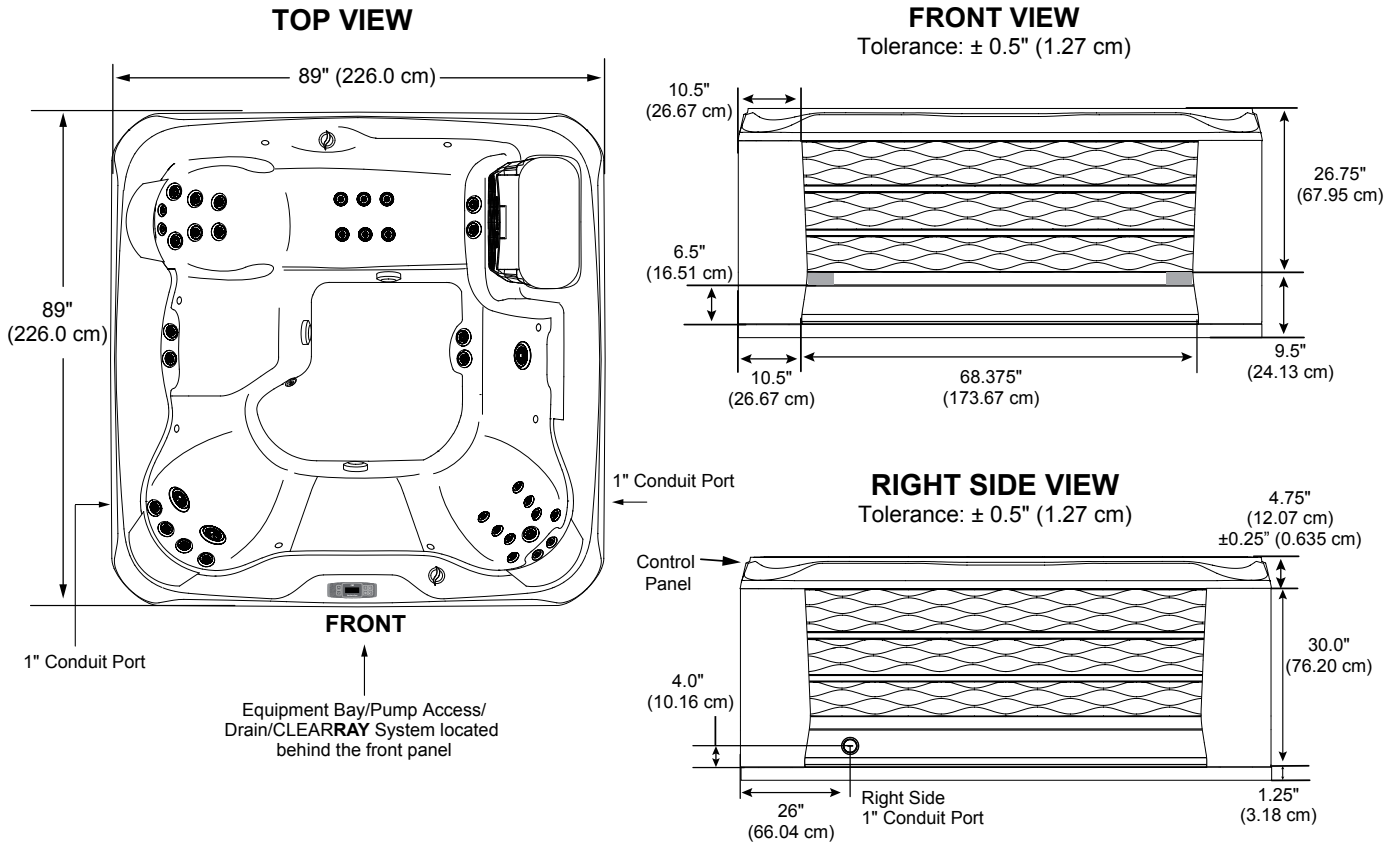

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

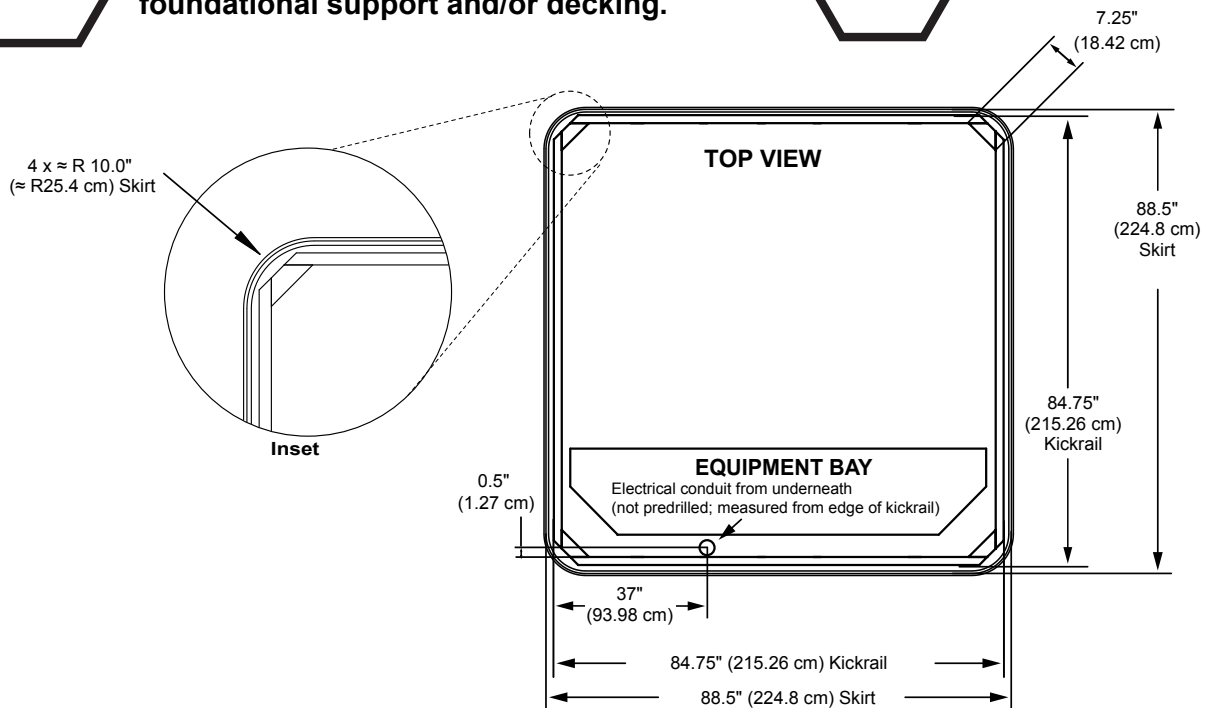

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice